

ApeosPort-V
C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275



ApeosPort-V

C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275

Digital Colour Multifunction Device

Smart Work Enabler



Transform the way you work

To ensure success, organisations must provide a work environment where individuals can work efficiently and flexibly.

For your organisation to perform at its full potential, you should use the best technology and business tools to work smarter and focus on what really matters.

The new ApeosPort-V C7775/C6675/C5575/C4475/C3375/C3373/C2275 solutions are designed to help you work smarter through business drivers such as innovation, cost efficiency, productivity and sustainability.



ApeosPort-V

C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275

The photo is of the ApeosPort-V C7775 CPS model

Bringing you ground breaking technology to help you work smarter

Industry First, Facial Recognition Technology

With Smart WelcomEyes Advance*, the recovery from sleep mode won't keep you waiting – it's ready when you are. It can also recognise the face of each user and use that information as a simple, rapid authentication process.

* Optional



Smart WelcomEyes Advance

The ApeosPort-V series automatically recovers from Sleep mode as users approach the device. With Smart WelcomEyes Advance, a real-time proximity camera and a pyroelectric heat sensor, detect when a user is approaching and recovers from Sleep mode so it is ready to use in just 3.1 seconds*.

This intuitive technology simplifies operational processes and saves both time and energy. What's more, a face recognition camera uses profiles to customise the touch screen interface to suit their particular applications**.

* With ApeosPort-V C3375/C3373/C2275

**Detailed specifications are set out in the Customer Expectation Document, which is available from your Fuji Xerox Account Manager.



1 This groundbreaking technology uses an infrared pyroelectric sensor to monitor thermal changes in the vicinity of the device and so detects a person approaching.



2 The user detection camera verifies human motion, such as the direction their toes are pointing, to determine whether the person wants to use the device.



3 It also offers a sophisticated, yet simple, user authentication method through face recognition. The face recognition camera can recognise the face of the user standing in front of the device, making authentication simple and fast.

* The local authentication mode must be enabled.

Simpler Operations


Navigating and operating screens can be simplified by installing a free optional software application – EasyUI Solution. This offers individual users a simple and easy-to-use operation screen, reducing working time.



Users can preview the finished results of their copying projects – for example, Nup, two-sided, stapled – when setting the copy functions.



Assign single touch buttons with commonly-used workflows for simple and quick operation.



Scanning is now much simpler with the automatic recognition of both the orientation and number of printed sides of the original document. The scan data destination is also set automatically during the authentication process. Or, if you prefer, you can select the destination quickly from your send history.

Image Recognition through a Reputable Processor

The technology of human/face recognition camera uses Image Recognition through a reputable processor for vehicle-mounted cameras. Rapid recognition of users enables the device to minimise power consumption, and ensure that it is ready for use immediately.

Experience the difference

Fuji Xerox iiX is a software integration layer allowing your ApeosPort-V solution to adapt to fit the way you work, not the other way around.

In adopting this approach to developing an integration layer in each ApeosPort-V solution, Fuji Xerox can unleash the powerful features of its technology and create personalised and customised document management solutions that you can access right from the device touch screen. These solutions can leverage your existing infrastructure and databases.

Cost management

In years gone by, the costs of office printing were frequently borne by the IT department alone and reported as a consolidated cost of doing business, without the visibility of who was printing what.

Some of the benefits of implementing one of Fuji Xerox's cost management solutions include:

- Identifying output costs down to the individual user, in order to keep operating costs low
- Precisely allocate/disperse costs to client accounts/internal cost centres or individual users
- Improved document and device security
- Print documents from just about anywhere, anytime and pick up their jobs at the time and location of their choosing
- Minimise security breaches caused by confidential printouts left unclaimed
- Enhance your sustainability initiatives by reducing paper and energy use
- Encourage mobile flexibility with smartphones and tablets
- Reduce waste and misuse of resources



Mobility solutions

Smart phones keep getting smarter. Applications for tablet computers are emerging at dizzying speeds. And the cloud that links them all is limitless in scope. Mobile computing is no longer a technology trend, but rather, an integral component for your business to improve customer experience when dealing with you.

As mobile devices encroach even further into the Australian corporate space, Fuji Xerox has the answers to enable customers to take advantage of this new "wave" of technology.

Fuji Xerox mobility solutions can enhance the usability of mobile devices in the workplace to improve productivity for users on the move. From simply printing documents and photos stored on a mobile device to integrating these mobile devices with your existing system to enhance document sharing and collaboration.



Cloud solutions

The Internet has fundamentally changed the way we do business today. The demand to access information instantly from anywhere, anytime is critical to the growth of your business. Respond to this demand quickly and affordably with innovative Fuji Xerox Cloud Solutions.

Working Folder is an easy, affordable and reliable way to store documents, collaborate on content or digitise inbound paper transmissions helping you to shift your business into the mobile era.

Connect to for Salesforce can free up more productive time by reducing manual steps in uploading documents to your CRM – Salesforce. From your networked device you can connect to one of the industry leading CRM solutions. All you need is an optional enabler from Fuji Xerox and a subscription to Salesforce.



Improving your business performance and uptime

Mobility in the Workplace

Mobile professionals can stay connected to the communications tools and productivity solutions offered by the ApeosPort-V C7775 series – for more flexibility regardless of location.



Simple and Easy to Use

New 9-inch, colour touch screen features simple icons driven by flick, drag and tap operation promoting similar and consistent operability when using a smart phone/tablet device.

Single touch icons can be created for frequently-used functions. Assign the single touch icon its own scanning workflow for fast document distribution and archiving.



Onboard Scanning Solutions


Dramatically increase your workflow efficiency with these onboard scanning solutions: on-box Optical Character Recognition with searchable PDF creation; secure PDF; scan to USB device; Scan to Email, Folder, and Network*. Plus, single pass scanning simultaneously scans both sides of two-sided documents, while high compression technology reduces file sizes.

*Optional accessories may be required.

Conversion to editable Word® and Excel® files

Scanned documents can be converted to Microsoft Word® and Excel® format so you can edit them easily*. Documents can be retrieved from your server and easily used, saving time and hassle for users by eliminating rekeying chores.

* Optional. The Advanced Scan Kit is required.

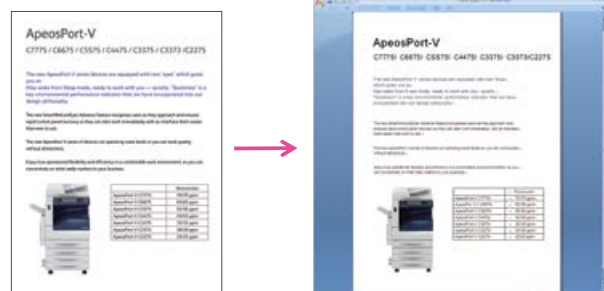

Output media

Word data

Remote Power Control (Power Off)

Devices located some distance from system administrators may be switched off remotely by PC. In large facilities such as a campus or factory building, this function can reduce the time and labour required to walk to every device and switch it off individually.

Extend your office productivity possibilities

Experience high output performance with print speeds of up to 70 pages per minute (ppm), with a fast recovery from sleep mode of 3.1 seconds.

* For ApeosPort-V C3375/C3373/C2275. 10.5 seconds for ApeosPort-V C5575/C4475. 14.0 seconds for ApeosPort-V C7775/C6675.

Scan and copy more, faster

Single-pass, duplex scanner* scans at speeds of up to 160 images per minute for exceptional productivity. The lightweight, duplex automatic document feeder can also hold up to 130 sheets.

*Optional Single-pass scanner is required for ApeosPort-V C3375/C3373/C2275.

Support for banner printing

You can now print posters in your office with the ApeosPort-V series. They are capable of handling paper sizes up to 1,200mm x 320mm, offering up many new print and copy possibilities.



Powerful media handling

Supporting a wide range of media weights from 52gsm up to 300gsm giving you access to more applications that meet your internal requirements.

Hole punched paper and envelope are also supported

Punched paper suitable for filing is supported. Printing on envelopes of up to 70gsm is supported, without the occurrence of folding/wrinkle effect.

Productivity anywhere your business takes you

Walk-up simplicity

Print from and scan to any USB memory device for faster document delivery when you're not at your computer.

* Optional.




Direct access from ApeosPort-V to cloud

By registering documents to "Working Folder", a cloud service offered by Fuji Xerox by subscription, users can view documents from their smartphones and tablet devices, even while they are away from their office. Faxed and scanned documents can also be registered directly from ApeosPort-V to Working Folder, so that several people can share the information quickly.

Mobile access from just about anywhere, anytime

Apple® AirPrint™ allows printing email, photos and important office documents directly from Apple iPhone®, iPad® or Mac devices with no drivers to install.

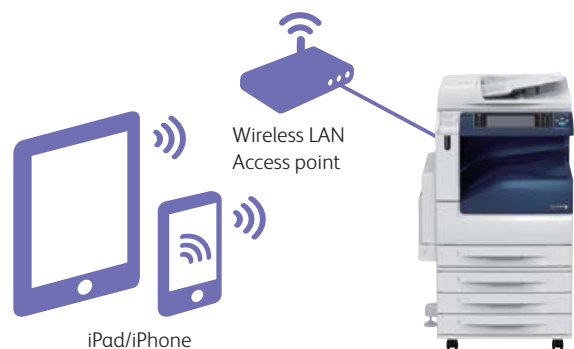

Building your business for a secure and sustainable future

"Real Green" Solutions

Fuji Xerox is committed to real, measurable green solutions in office environments.

These can be achieved while at the same time improving user convenience and efficiency during operations.



Smart Energy Management Technology.

Our innovative Smart Energy Management Technology reduces energy usage by only activating the functions required by the user. What's more, you will enjoy a much quieter office environment.

Two second start up time – no need to wait!

When the ApeosPort-V series recovers from sleep mode, it takes only two seconds to start working. Even if the device is routinely set to sleep mode to reduce power use, users don't experience any delays in set-up and operation.


High-precision LED print head technology for reduced power use

Digitally Enhanced Lighting Control Imaging System (DELICIS) achieves an output print resolution of 1,200 x 2,400 dpi that is equivalent or even superior to that produced by a conventional laser raster output scanner (ROS) system. LED print head technology makes it possible to build smaller devices and improve energy efficiency.

A Quiet Environment for Greater Efficiency

To continue to address the levels of noise in the office environment, we have introduced advanced technologies to our "Quiet Flagship Model" such as the Duplex Automatic Document Feeder*, incorporating new image processing.

* 63% improvement in quietness compared to conventional models.

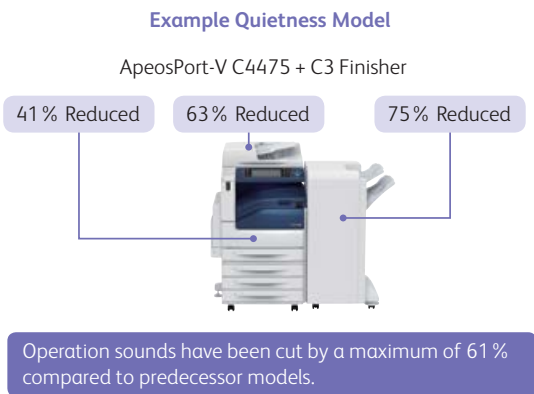


Improved energy efficiency in induction heating fuser technology

Induction heating fusing technology eliminates the need for pre-heating the fusing unit and minimises power use when the machine is in standby mode.


TEC value		ApeosPort-V C2275	0.99 kWh
		ApeosPort-V C3373	1.25 kWh
		ApeosPort-V C3375	1.42 kWh
		ApeosPort-V C4475	2.11 kWh
		ApeosPort-V C5575	2.66 kWh
		ApeosPort-V C6675	3.52 kWh
		ApeosPort-V C7775	3.73 kWh

Extra functionality in finishing




Stapling

Stapling multiple page documents, such as meeting materials into sets, is available.




Punch

A hole punch process can be used for filing documents in binders.




Saddle stitching

This bi-fold and stapling process is ideal for creating catalogues and booklets.







Z Fold

Z Fold is useful to include A3 documents in A4 size.



Tri-fold

The C-fold is useful when creating materials for envelopes.

	Finisher A1	Finisher B1 + Booklet Maker Unit for Finisher-B1	C3 Finisher with Booklet Maker	C3 Finisher with Booklet Maker + Folder Unit CD1
				
Stapling thickness	50 sheets	50 sheets	50 or 65 sheets ^{*4}	50 or 65 sheets ^{*4}
Punch	—	2/4 hole punch ^{*1} or 2/3 hole punch ^{*2}	2/4 hole punch ^{*5} or 2/3 hole punch ^{*6}	2/4 hole punch ^{*5} or 2/3 hole punch ^{*6}
Saddle stitching	—	○ ^{*3}	○	○
Bi-fold	—	○ ^{*3}	○	○
Tri-fold	—	—	—	○ ^{*8}
Z Fold	—	—	—	○ ^{*8}
Tray capacity ^{*7}	Output tray	—	500 sheets	500 sheets
	Finisher tray	500 sheets	2,000 sheets	1,500 sheets

*1: 2/4 Hole Punch Kit for Finisher-B1 is required.

*2: US 2/3 Hole Punch Kit for Finisher-B1 is required.

*3: Booklet Maker Unit for Finisher-B1 is required. For the features of saddle stitching or bi-folding, Finisher B1 does not perform folding but perform scoring.

*4: C3 Finisher Staple Unit 65 Sheets is required.

*5: Punch Unit 2H/4H is required.

*6: Punch Unit US 2H/3H is required.

*7: 64gsm paper

*8: Folder Unit CD1 is required.

Output Tray Designation

When Inner Output Tray **1** or Side Tray **2** is attached, you can designate the machine's output trays to be used for specific functions, i.e. copy, print, or fax.



High-Capacity Feeders

Choose the Tandem Tray **3**, which can accommodate up to 3,090 sheets.

In addition, an optional High Capacity Feeder which can hold up to 2,030 sheets* of A4-size media (one tray) **4** is available. It supports large-volume output demands.



* 80gsm paper.

Specifications of ApeosPort-V C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275

Basic Specifications/Copy Function

Item	ApeosPort-V C7775	ApeosPort-V C6675	ApeosPort-V C5575	ApeosPort-V C4475	ApeosPort-V C3375	ApeosPort-V C3373	ApeosPort-V C2275
Memory Capacity	4 GB						
Hard Disk Capacity	160 GB or larger (Usable space: 128 GB)						
Scanning Resolution	600 x 600 dpi						
Printing Resolution	1,200 x 2,400 dpi (High Resolution Photo), 600 x 600 dpi (Text/Text-Photo/Photo/Map)						
Warm-up Time	30 seconds or less (20 degrees Celsius room temperature). 24 seconds or less if the main power is on (20 degrees Celsius room temperature)						
Original Paper Size	Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book						
Paper Size	Max	SRA3 (320 x 450 mm), 12.6 x 17.7" (320 x 449.6 mm), 12 x 18" (304.8 x 457.2 mm), A3 [12 x 19" (304.8 x 482.6 mm) when using Bypass Tray]					
	Min	A5 [Postcard and Quadrate NO.3 Envelope (120 x 235 mm) when using Bypass Tray]					
	Image loss width	Lead edge 4 mm or less, trail edge 2 mm or less, and right&left 2 mm or less					
Paper Weight* ¹	Paper Tray	52 - 300 gsm					
	Bypass Tray	52 - 300 gsm					
First Copy Output Time* ²		B/W: 3.3 sec. Colour: 4.1 sec.	B/W: 3.3 sec. Colour: 4.1 sec.	B/W: 3.7 sec. Colour: 5.2 sec.	B/W: 4.4 sec. Colour: 5.7 sec.	B/W: 4.9 sec. Colour: 6.4 sec.	B/W: 4.9 sec. Colour: 6.6 sec. Colour: 8.7 sec.
Continuous Copy Speed* ³	A4	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 55 ppm Colour: 50 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm
	A3	B/W: 35 ppm Colour: 35 ppm	B/W: 32 ppm Colour: 32 ppm	B/W: 27 ppm Colour: 25 ppm	B/W: 22 ppm Colour: 22 ppm	B/W: 20 ppm Colour: 20 ppm	B/W: 17 ppm Colour: 14 ppm
Paper Tray Capacity* ⁴	Standard	[C7775/C6675/C5575/C4475/C3375/C3373/C2275] 500 sheets x 2 Tray + 867 sheets + 1,133 sheets + Bypass Tray 90 sheets [C5575/C4475/C3375/C3373/C2275] 4 Tray Model: 500 sheets x 4 Tray + Bypass Tray 90 sheets					
	Optional	HCF B1: 2,030 sheets					
	Maximum Paper Capacity	[C7775/C6675/C5575/C4475/C3375/C3373/C2275] 5,120 sheets (Tandem Tray Model + High Capacity Feeder B1) [C5575/C4475/C3375/C3373/C2275] 4,120 sheets (4 Tray Model + High Capacity Feeder B1)					
Output Tray Capacity* ^{4,5}	250 sheets (A4 LEF), 125 sheets (A3)						
Power Source	AC 220 - 240 V, 8 A, 50/60 Hz						
Power Consumption	2.4kW or less Sleep mode: 1.3W or less Standby mode: 119W or less			2.4kW or less Sleep mode: 1.3W or less Standby mode: 105W or less		2.4kW or less Sleep mode: 1.3W or less Standby mode: 56W or less	
Dimensions	[C7775/C6675/C5575/C4475/C3375/C3373/C2275] W 640 x D 699 x H 1,143 mm (when Duplex Automatic Document Feeder B1-PC is installed) [C3375/C3373/C2275] W 640 x D 699 x H 1,128 mm (when Duplex Automatic Document Feeder B1-C is installed)						
Weight* ⁶	148 kg (With Fax and Duplex Automatic Document Feeder B1-PC)			135 kg* ⁷ (With Fax and Duplex Automatic Document Feeder B1-PC)		130 kg* ⁷ (With Fax and Duplex Automatic Document Feeder B1-C)	

*1: Fuji Xerox advises that operators use its recommended paper. Performance may vary for supported speciality and heavy weight media. Documents may not be printed correctly depending on usage conditions. *2: B/W: A4 LEF/ Monochrome priority mode, Colour: A4 LEF/Colour priority mode *3: The speed may be reduced due to the image quality adjustment. *4: 80gsm Paper. *5: When the Inner Output Tray is installed, the center tray capacity is 250 sheets (A4 LEF) and the Inner Output Tray capacity is 250 sheets (A4 LEF). *6: Excluding Toner Cartridge. *7: With the 3 Tray Module.

Print Function

Item		Description
Printing Resolution	Output Resolution	1,200 x 2,400 dpi
PDL	Standard	PCL5/PCL6, Adobe® PostScript® 3™
Supported Operating System*1	Standard	[PCL6] Windows® XP, Windows Server® 2003 (32-bit) Windows Vista® (32-bit), Windows Server® 2008 (32-bit) Windows® 7 (32-bit), Windows® 8 (32-bit) Windows® XP Professional (64-bit), Windows Server® 2003 (64-bit) Windows Vista® (64-bit), Windows Server® 2008 (64-bit) Windows® 7 (64-bit), Windows Server® 2008 R2 (64-bit) Windows® 8 (64-bit), Windows Server® 2012 (64-bit) [Mac OS X Driver] Mac OS X 10.5/10.6/10.7/10.8
		[Adobe® PostScript® 3™ Driver] Windows® XP, Windows Server® 2003 (32-bit) Windows Vista® (32-bit), Windows Server® 2008 (32-bit) Windows® 7 (32-bit), Windows® 8 (32-bit) Windows® XP Professional (64-bit), Windows Server® 2003 (64-bit) Windows Vista® (64-bit), Windows Server® 2008 (64-bit) Windows® 7 (64-bit), Windows Server® 2008 R2 (64-bit) Windows® 8 (64-bit), Windows Server® 2012 (64-bit) Mac OS X 10.4.11/10.5/10.6/10.7/10.8
Interface	Standard	Ethernet 100BASE-TX/10BASE-T, USB2.0
	Optional	Ethernet 1000BASE-T, Bidirectional Parallel (IEEE1284-B)

*1: See our official website for the latest supported OS.

Scan Function

Item	ApeosPort-V C7775	ApeosPort-V C6675	ApeosPort-V C5575	ApeosPort-V C4475	ApeosPort-V C3375	ApeosPort-V C3373	ApeosPort-V C2275
Type	Colour Scanner						
Scanning Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi						
Original Scanning Speed*1	Duplex Automatic Document Feeder B1-C	—			B/W: 70 ppm, Colour: 70 ppm		
	Duplex Automatic Document Feeder B1-PC	B/W: 80 ppm Colour: 80 ppm 80 ppm 1 pass, 2 sided scanning B/W: 160 ppm Colour: 160 ppm	B/W: 80 ppm Colour: 80 ppm 1 pass, 2 sided scanning B/W: 150 ppm*2 Colour: 150 ppm*2				
Interface	Standard	Ethernet 100BASE-TX/10BASE-T					
	Optional	Ethernet 1000BASE-T					

*1: The scanning speed varies depending on the documents. *2: 160 ppm for both B/W and colour when Quiet Mode is disabled. For ApeosPort-V C6675/C5575/C4475/C3375/C3373/C2275, Quiet Mode is enabled by factory default. This setting can be changed to suit the customer's usage.

Fax Function (Optional)

Item	Description
Document Size	Max: A3, 11 x 17", Long document (Longest 600 mm)
Recording Paper Size	Max: A3, 11 x 17" Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, fax communication (PSTN), maximum 3 ports (G3-3 port)

Standard Duplex Automatic Document Feeder B1-C

Item	ApeosPort-V C3375	ApeosPort-V C3373	ApeosPort-V C2275
Original Size / Paper Weight	Max: A3, 11 x 17"; Min: A5*1 38 - 128 gsm (In Duplex: 50 - 128 gsm)		
Capacity*2	110 sheets		
Feeding Speed (A4 LEF Simplex)	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm
Dimensions / Weight	W 560 × D 498 × H 125 mm, 8 kg		

*1: Nonstandard size single-sided mode: 125 × 85mm. *2: 64gsm paper.

Single-Pass Duplex Automatic Document Feeder B1-PC (Optional)

Item	ApeosPort-V C7775	ApeosPort-V C6675	ApeosPort-V C5575	ApeosPort-V C4475	ApeosPort-V C3375	ApeosPort-V C3373	ApeosPort-V C2275
Original Size / Paper Weight	Max: A3, 11 x 17"; Min: A5*1 38 - 128 gsm (In Duplex: 50 - 128 gsm)						
Capacity*2	130 sheets						
Feeding Speed (A4 LEF Simplex)	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 55 ppm Colour: 50 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm
Dimensions / Weight	W 560 × D 498 × H 140mm, 11 kg						

*1: Nonstandard size single-sided mode: 125 × 85mm. *2: 64 gsm paper.

Finisher-A1 (Optional)

Item	Description
Type	Sort (Offset available) / Stack (Offset available)
Paper Size	Max: A3, 11 x 17"; Min: Postcard
Paper Weight	52 - 220 gsm
Paper Capacity	Finishing Tray [Without Stapling] A4: 500 sheets; B4: 250 sheets; A3 or larger: 200 sheets.; Mixed Size Stacking: 250 sheets [With Stapling] 30 copies
Staple	Capacity A4: 50 sheets (90 gsm or less), B4 or larger: 30 sheets (90 gsm or less) Paper Size Max: A3, 11 x 17"; Min: B5 LEF Position Single stapling (Front/Angled)
Dimensions / Weight	W 559 × D 448 × H 246mm, 12 kg

Note: The unit cannot be installed on ApeosPort-V C7775/C6675/C5575/C4475.

Finisher-B1 (Optional)

Item	Description
Type	Sort (Offset available) / Stack (Offset available)
Paper Size*1	Max: A3, 11 x 17"; Min: B5 LEF
Paper Weight	52 -220 gsm
Paper Capacity	[Without Stapling] A4: 2,000 sheets; B4 or larger: 1,000 sheets; Mixed Size Stacking: 300 sheets [With Stapling] A4: 100 copies or 1,000 sheets, B4 or larger: 75 copies or 750 sheets [With Booklet Finishing]*2 50 copies or 600 sheets [With Scoring] 500 sheets
Staple	Capacity 50 sheets (90 gsm or less) Paper Size Max: A3, 11 x 17"; Min: B5 LEF Position Single stapling (Front/Angled, Back/Straight) or dual stapling (Parallel)
Punch*3	Number of Holes 2-hole/4-hole punch or 2-hole/3-hole punch (US Specifications) Paper Size A3, 11 x 17", B4, A4, A4 LEF, Letter, Letter LEF, B5 LEF Paper Weight 55 - 200 gsm
Booklet Finishing*2	Capacity Saddle Staple: 15 sheets; Scoring: 5 sheets Paper Size Max: A3, 11 x 17"; Min: A4, Letter Paper Weight Saddle Staple: 64 - 80 gsm, Scoring: 64 - 105 gsm
Dimensions / Weight	W 620 × D 552 × H 987mm, 28 kg With Booklet Finisher: W 620 x D 597 x H 1,057 mm, 37 kg

*1: Paper in the sizes larger than A3 or 11 x 17" or smaller than B5 are delivered to the Center Tray. *2: The Booklet Finishing function requires the Booklet Maker Unit for Finisher-B1. *3: The Punch function requires the 2/4 Hole Punch Kit for Finisher-B1 or US 2/3 Hole Punch Kit for Finisher-B1. Note: The unit cannot be installed on ApeosPort-V C7775/C6675.

Folder Unit CD1 (Optional)

Item	Description
Paper Size	Z Fold Half Sheet A3, 11 x 17", B4 Tri-fold A4, Letter
Paper Weight	Z Fold Half Sheet 60-90 gsm Tri-fold 60-90 gsm
Power / Maximum power consumption	AC100V +/- 10%, 1.0A, 50/60Hz common, 100W or less
Dimensions / Weight	W 232 x D 726 x H 991mm, 52.1 kg or less

Note: Power supply separate from the main unit is required.

C3 Finisher with Booklet Maker (Optional)

Item	Description
Type	Output Tray Sort/Stack Finishing Tray Sort (Offset available) / Stack (Offset available) Booklet Tray Sort/Stack
Paper Size*1	Output Tray Max: 12 x 19" (304.8 x 482.6 mm); Min: Postcard Finishing Tray Max: 12 x 19" (304.8 x 482.6 mm); Min: B5 Booklet Tray Max: 12 x 18" (304.8 x 457.2mm); Min: B5
Paper Weight	Output Tray 52 - 300 gsm Finishing Tray 52 - 300 gsm Booklet Tray 60 - 105 gsm*3
Paper Capacity	Output Tray 500 sheets (A4) Finishing Tray [Without Stapling] A4: 1,500 sheets; B4 or larger: 1,500 sheets; Mixed Size Stacking 300 sheets [With Stapling] A4: 200 copies or 1,500 sheets; B4 or larger: 100 copies or 1,500 sheets; Mixed Size Stacking: 70 copies or 200 sheets Booklet Tray 20 copies
Staple	Capacity 50 sheets (90 gsm or less)*2 Paper Size Max: A3, 11 x 17"; Min: B5 Position Single stapling (front/back, angled), dual stapling (parallel)
Punch	Number of Holes 2-hole/4-hole punch or 2-hole/3-hole punch Paper Size A3, 11 x 17", B4, A4, A4 LEF, Letter, Letter LEF (8.5 x 11"), B5 LEF, 7.25 x 10.5", 8 x 10", 16K, Cover A4, 9 x 11", 215 x 315 mm, 8.5 x 13", Legal (8.5 x 14"), 11 x 15", 8K Paper Weight 52 - 200 gsm
Booklet Finishing	Capacity Saddle Staple: 16 sheets; Fold: 5 sheets; Single Fold: 1 sheet Paper Size Max: SRA3 (320 x 450 mm), 12 x 18" (304.8 x 457.2 mm); Min: B5 Paper Weight Saddle Staple: 60 - 105*4,5 gsm; Middle-Fold: 60 - 105*4,5 gsm; Single Fold: 60 - 105 gsm
Dimensions / Weight	W 790 × D 589 × H 1,056 mm, 61 kg W 1,025 × D 726 × H 1,056 mm, 115 kg (when Folder Unit CD1 and Punch Unit are installed)

*1: Paper less than B5 size is delivered from the Center Tray. *2: Up to 65 sheets can be stapled when the C3 Finisher Staple Unit 65 Sheets is installed. *3: Cover sheets can be up to 256 gsm. *4: Covers can be up to 256 gsm (Thick Paper 2) for saddle staple during printing. *5: Printed covers can be up to 169 gsm (Thick Paper 1) for middle-fold or saddle staple during copying, while blank covers can be up to 256 gsm (Thick Paper 2).

HCF B1 (Optional)

Item	Description
Paper Size / Paper Weight	A4 LEF, Letter LEF, B5 LEF, 55 - 216 gsm
Feeding Capacity*1 / Number of Tray	2,030 sheets x 1-tray
Dimensions / Weight	W 389 × D 610 × H 380mm, 29 kg

*1: 80gsm paper.

Side Tray

Item	Description
Paper Size / Paper Weight	Same as the Basic Specifications / Copy Function
Paper Capacity*1	100 sheets
Dimensions / Weight	W 353 × D 469 × H 198mm, 1 kg

*1: 64gsm paper.

Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances refer to the Customer Expectation Document.

Descriptions in this material, product specifications and / or appearances are subject to change without prior notice due to improvements. Please note that the product colour appears differently from the actual colour as a result of properties of papers or printing ink. Windows is registered trademarks of Microsoft Corporation. Other company names or product names are registered trademarks or trademarks of each company.

<Reproduction Prohibitions> Please note that reproduction of the following is prohibited by law:
Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates. Unused postage stamps and post cards. Certificate stamps stipulated by law. The reproduction of copyrighted works (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range.



<For Your Safe Use>
● Before using the product, read the Instruction Manual carefully for proper use. ● Use the product with an appropriate and adequate power source and voltage displayed. ● Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.



For more information or detailed product specification,
please call or visit us at

Fuji Xerox Australia

101 Waterloo Road, Macquarie Park NSW 2113

Tel. (02) 9856 5000 Fax. (02) 9856 5003

<http://www.fujixerox.com.au>