



Compact size with wide possibilities.

The new DocuCentre-V C2265 / C2263 has advanced functions previously only seen in higher-end models.

Providing easy-to-use operability, improved image quality and its new noise-reduction technologies this device allows you to concentrate on being more productive.

Flexibility is the key in today's modern workplace and with its compact design, this device can be installed anywhere, enabling it to be actively utilised in various workplaces.

| | | | |
|---|--|--|---|
| <p>Copy</p> <p>B / W, Colour</p> <p>C2265 C2263</p> <p>25 20</p> <p>ppm*1</p> | <p>Print</p> <p>B / W, Colour</p> <p>C2265 C2263</p> <p>25 20</p> <p>ppm*1</p> | <p>Fax</p> <p>Super G3 Supported</p> | <p>Scan</p> <p>B / W, Colour</p> <p>55</p> <p>ppm*2</p> |
|---|--|--|---|



● : Standard ○ : Optional

| | Copy | Print | Fax | Scan | DADF |
|-----------|------|-------|-----|------|------|
| Model-CPS | ● | ● | ○ | ● | ● |

* DocuCentreV 2263 with optional side tray and fax kit.

A variety of options with a variety of combinations.
Adaptable to any installation space.



Finishing Options



1 Finisher-A1
Staple



2 Finisher-B1
Staple 2-hole punch



3 Booklet Maker Unit for Finisher B1
Staple 2-hole punch+saddle staple



4 1 Tray Module with Cabinet



5 3 Tray module

Convenient inner output tray and envelope printing via bypass tray



The inner tray and optional side tray allows you to configure output destination for copy, fax and print jobs.



Easy envelope printing via the bypass tray.

Easy and efficient operation



Easy Fingertip Control.

The new DocuCentre-V series takes advantage of technology seen in smartphones and tablets by enabling users to operate the devices intuitively, for faster and more efficient production. Four different gestures – tap, double-tap, drag and flick – can be used to scroll and switch functions smoothly and quickly.

High quality

1200 x 2400 dpi output resolution with the adoption of a high-quality, energy saving LED print head. Fuji Xerox's Image Registration Control Technology "IReCT", used in high-end models, provides ultra-high-precision print images with minimum colour shifts.

Faster scan

The Duplex Automatic Document Feeder is capable of stacking up to 110 sheets, quickly reading both colour and monochrome documents at 55 sheets per minute. Easily turning large amounts of paper documents into electronic form.



Scanned data can be converted to DocuWorks document or PDF, when sending as an e-mail or storing to PC. Functions also available such as OCR* – useful for search, compression to reduce communication load, and password to provide security. Scanned data can be saved directly to USB memory.

* Optional.

Easy-to-use scan applications

Scan Auto


Scanning is now much simpler with the automatic recognition of both the orientation and number of printed sides of the original document. The scan data destination is also set automatically during the authentication process. Or, if you prefer, you can select the destination quickly from your send history.



* ScanAuto is pre-installed, but must be configured before use.

Easy operation from "Simple" windows


"Simple Copy" and "Simple Fax" windows are available for easy operation, showing only the basic settings with easier to read 5 mm font.

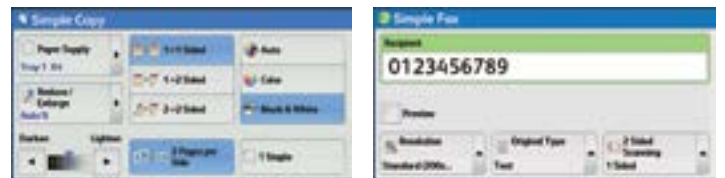

Waste-free fax

[Receiving]

Thumbnails of received faxes stored in a folder can be viewed to print only the necessary documents. This reduces unnecessary print outs. Once a fax is stored in a folder, you can send it via email or transfer it to a shared folder in addition to printing. You can even view the fax on your mobile device while on the go.

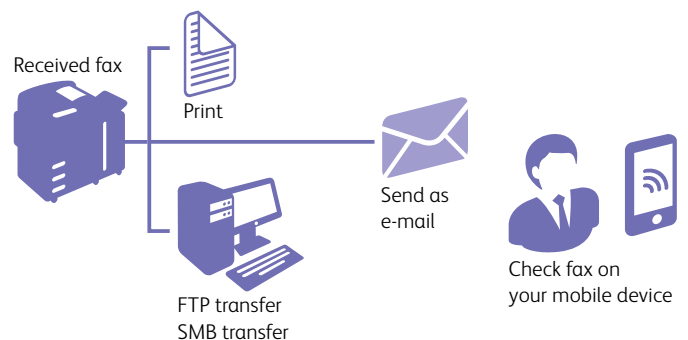

[Sending]

Direct Fax (sending fax directly from PC) can also be used. Sent fax documents can be saved as a PDF and sent as e-mail attachments.

[Reject]

Allows you to block incoming faxes from certain preset and anonymous numbers.

Supports secure and waste-free output

Print jobs are stored in the HDD of the multifunction device and output only after authentication. This prevents uncollected print output and print error. You can also set the number of copies or change the print settings from single to double sided or colour to monochrome mode during output, reducing error, waste, and TCO (Total Cost of Ownership).

* Requires use of authenticate mode.

Authentication using IC card


The authentication function can be used to restrict unauthorized users from accessing the multifunction device. You can also check each user's usage from the job log. Authentication using an IC card is also possible by adding an IC card reader to the multifunction device.

Efficiently utilise multiple multifunction devices

Printable from Any Machine on Demand

After a job has been sent to the device, users can choose the "Server-less On-demand" feature to print it from any machine on the network, simply by logging on to the machine. Even if the selected device is in use, users can choose their job from another machine and print it. No dedicated server is required for this feature. It is also possible to use up to five devices in this way by grouping them – for example, by floor or workgroup.

* Optional.

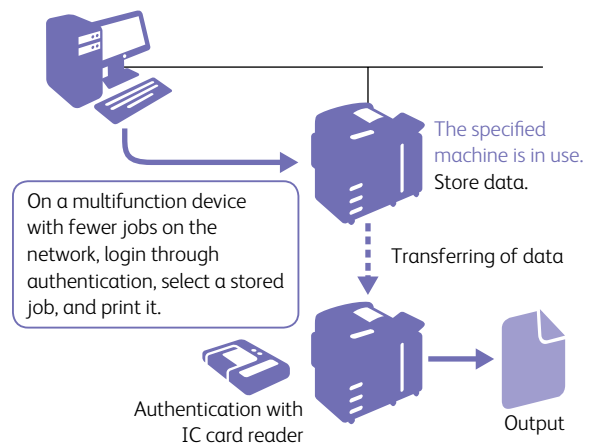

Easy printing wherever you are

Mobile Print Utility for iOS / Android

This free Fuji Xerox application lets you print web pages, pictures, DocuWorks and PDF documents, and import scanned documents to mobile devices. You can configure it to print N-up and duplex. Server-less On-demand printing is also available by assigning authentication information. Additionally, the application is supported by standard printing frameworks on Android™ OS 4.4 or later.

Google Cloud Print

By registering the multifunction device with Google Cloud Print, you can send documents via the cloud from Android™ devices, Chromebook™ and PC's.

*Google Cloud Print is a web printing service provided by Google.



Wi-Fi Direct®

Users can connect the DocuCentre-V series devices anywhere, without the need for network cabling.

* Optional.

AirPrint

Apple® AirPrint™ allows printing of emails, photos and important office documents directly from Apple iPhone®, iPad® or Mac devices with no drivers to install.



Mopria™ Print

Print even more easily from Android. The Mopria Print Service is an application which lets you print directly from devices running Android 4.4 (KitKat) or later. Documents such as photographs, web pages and PDF files can be printed easily via a wireless LAN to Mopria-certified output devices.



* Mopria Print Service can be downloaded for free from Google Play™. (Android™ 4.4 or later)

Environmentally responsible

A Quiet Environment for Greater Efficiency


To continue to address the levels of noise in the office environment, we have introduced advanced technologies to reduce operation sounds.

Environmentally safe new materials

Facing the challenges of modern society such as global warming, petroleum resource depletion and food shortages, Fuji Xerox is engaged in the research and development of environment friendly cellulosic bio-based plastics. The newly developed “woody non-edible biomass plastics” has more strength and flame resistance compared with the conventional petroleum-based plastics and contributes to the reduction of CO₂ emissions.

Smart Energy Management Technology

The new DocuCentre-V series uses Smart Energy Management to power only the functions required by the user. This reduces power consumption and CO₂ emissions. What's more, you will enjoy a much quieter office environment.

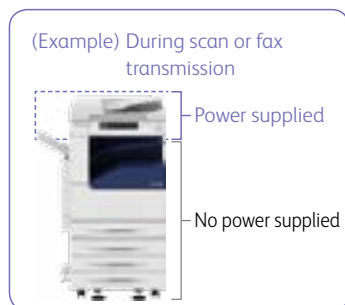


Three second start up time – no need to wait!

When the DocuCentre-V series recovers from sleep mode, it takes only three seconds to start working. Even if the device is routinely set to sleep mode to reduce power use, users don't experience any delays in set-up and operation.

Energy-saving design consuming less than 1.0 W power during sleep mode

The newly adopted low-power controller and fax board significantly improves power consumption during sleep mode, increasing energy efficiency.


Sleep mode power consumption comparison (unit: W)

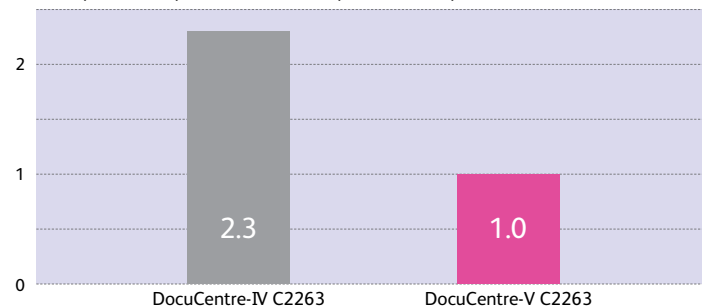

Reduced power consumption with excellent TEC value

Complies with International ENERGY STAR® Program. Greatly contributes to reduction of power consumption.

* Value measured by the test defined in International ENERGY STAR® Program.




Cloud service connecting directly to the multifunction device

Direct access from the multifunction device to Fuji Xerox's cloud service “Working Folder.” You can transfer scanned documents and received fax documents, and also output saved documents. In addition to editing documents in the cloud via DocuWorks Desk, you can also view and edit them from your mobile device.

* Agreement to use the Working Folder service is necessary in order to use this function.


Quickly check received faxes on the go

Automatically upload received faxes to “Working Folder”.

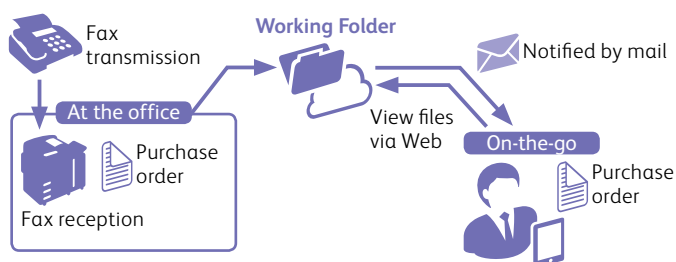

Efficiently perform business activities on the road through mobile document access

Documents in the Working Folder can be accessed even from a smartphone or tablet.

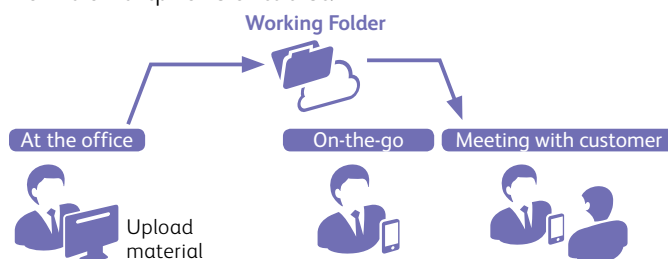

Specifications of DocuCentre-V C2265 / C2263

Basic Specifications/Copy Function

| Item | DocuCentre-V C2265 | DocuCentre-V C2263 | |
|---------------------------|---|--|-----------------------------|
| Type | Desktop / Console | | |
| Memory capacity | 4 GB (Max: 4 GB) | | |
| Hard disk capacity*1 | 160 GB or larger (Usable space: 128 GB) | | |
| Colour Capability | Full Colour | | |
| Scan Resolution | 600 x 600 dpi | | |
| Print Resolution | 1200 x 2400 dpi | | |
| Warm-up Time | 30 seconds or less, 22 seconds or less if the main power is on (At room temperature 23°C) | | |
| Original Size | Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book | | |
| Paper Size | Max | A3, 11 x 17" | |
| | Min | A5 [Postcard (100 x 148 mm) and Envelope Monarch (191 x 98 mm) when using Bypass Tray] | |
| | Image loss width | Lead Edge 4.0 mm, Trail Edge 2.0 mm, Right & Left Edges 2.0 mm | |
| Paper Weight*2 | Paper Tray | 60 to 256 gsm | |
| | Bypass Tray | 60 to 216 gsm | |
| First Copy Output Time | B/W*3 | 5.9 sec. | |
| | Colour*4 | 8.1 sec. | |
| Continuous Copy Speed*5 | A4 LEF / B5 LEF | B/W: 25 ppm, Colour: 25 ppm | B/W: 20 ppm, Colour: 20 ppm |
| | A4 | B/W: 19 ppm, Colour: 19 ppm | B/W: 16 ppm, Colour: 16 ppm |
| | B5 | B/W: 14 ppm, Colour: 14 ppm | B/W: 11 ppm, Colour: 11 ppm |
| | B4 | B/W: 16 ppm, Colour: 16 ppm | B/W: 13 ppm, Colour: 13 ppm |
| | A3 | B/W: 14 ppm, Colour: 14 ppm | B/W: 11 ppm, Colour: 11 ppm |
| Paper Tray Capacity*6 | Standard | 500 sheets x 1-tray + Bypass Tray 96 sheets | |
| | Optional | 1 Tray Module with Cabinet: 500 sheets x 1-tray 3 Tray Module: 500 sheets x 3-tray | |
| | Max | 2096 sheets [Standard + 3 Tray Module] | |
| Output Tray Capacity*7 | Upper Center: 250 sheets (A4 LEF), Lower Center: 250 sheets (A4 LEF) | | |
| Power Supply | AC220-240 V +/- 10 %, 8 A, 50/60 Hz common | | |
| Maximum Power Consumption | 1.76 kW or less (AC220 V +/- 10%), 1.92 kW or less (AC240 V +/- 10%) | | |
| | Sleep Mode: 1.0 W or less (AC220 V +/- 10%) | | |
| | Ready Mode: 78 W or less (AC220 V +/- 10%) | | |
| Dimensions | W 590 x D 659 x H 768 mm | | |
| | W 616 x D 659 x H 1119 mm (when optional 1 Tray Module with cabinet is installed.) | | |
| | W 616 x D 659 x H 1119 mm (when optional 3 Tray Module is installed.) | | |
| Weight*8 | 68 kg | | |
| | 92 kg (when optional 1 Tray Module with cabinet is installed.) | | |
| | 95 kg (when optional 3 Tray Module is installed.) | | |

*1: The Storage Hard disk capacity is not totally available for customers. *2: It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement.
*3: A4 LEF / Monochrome priority mode. *4: A4 LEF / Colour priority mode. *5: The speed may be reduced due to the image quality adjustment. *6: 80 gsm paper. *7: 64 gsm paper. *8: Excluding Toner Cartridge.

Print Function

| Item | Description | |
|----------------------------|--|---|
| Type | Built-in type | |
| Continuous Print Speed*1 | Same as the Basic Specifications / Copy Function | |
| Printing Resolution | 600 x 600 dpi, 1200 x 2400 dpi | |
| Page Description Language | Standard | PCL5 / PCL6 |
| | Optional | Adobe® PostScript® 3™ |
| Supported Operating System | Standard (PCL Driver) | Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit) |
| | Optional (Adobe® PostScript® 3™ Driver) | Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit) OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5 |
| Interface | Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB2.0 | |

*1: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

Side Tray

| Item | Description |
|------------------|--------------------------|
| Paper Capacity*1 | 100 sheets |
| Dimensions | W 353 x D 429 x H 198 mm |

*1: 64 gsm paper.

Scan Function

| Item | Description |
|-----------------|---|
| Type | Colour Scanner |
| Scan Resolution | 600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi |
| Scan Speed*1 | Duplex Automatic Document Feeder B/W: 55 ppm, Colour: 55 ppm [Fuji Xerox Standard Paper (A4 LEF), 200dpi, to Folder.] |
| Interface | Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T |

*1: The scanning speed varies depending on the documents.

Fax Function (Optional)

| Item | Description |
|----------------------|---|
| Original Size | Max: A3, 11 x 17", Long document (Longest 600 mm) |
| Recording Paper Size | Max: A3, 11 x 17" Min: A5 |
| Transmission Time | 2 seconds and more but fewer than 3 seconds*1 |
| Transmission Mode | ITU-T G3 |
| Applicable Lines | Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports*2 (G3-3 ports) |

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines / mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder

| Item | DocuCentre-V C2265 | DocuCentre-V C2263 |
|--------------------------------|--|-------------------------------|
| Original Size | Max: A3, 11 x 17" Min: A5 *1 | |
| Paper Weight | 38 to 128 gsm (In Duplex: 50 to 128 gsm) | |
| Capacity*2 | 110 sheets | |
| Feeding Speed (A4 LEF Simplex) | B/W: 25 ppm Colour: 25 ppm | B/W: 20 ppm Colour: 20 ppm |

*1: The minimum custom size is 125 x 85 mm. *2: 64 gsm paper.

Finisher-A1 (Optional)

| Item | Description | |
|------------------|--|---|
| Type | Sort (Offset available) / Stack (Offset available) | |
| Paper Size | Max: A3, 11 x 17" Min: Postcard (100 x 148 mm) | |
| Paper Weight | 60 to 220 gsm | |
| Paper Capacity*1 | Finishing Tray | [Without Stapling] A4: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking*2 : 250 sheets [With Stapling] 30 sets |
| | Capacity | A4: 50 sheets (90 gsm or less), B4 or larger: 30 sheets (90 gsm or less) |
| Staple | Paper Size | Max: A3, 11 x 17" Min: B5 LEF |
| | Position | Single stapling |
| Dimensions | W 559 x D 448 x H 246 mm | |
| Weight | 12 kg | |

*1: 64 gsm paper. *2: When larger size sheets are stacked on top of smaller size sheets.

Finisher-B1 (Optional)

| Item | Description | |
|---------------------|---|--|
| Type | Sort (Offset available) / Stack (Offset available) | |
| Paper Size*1 | Max: A3, 11 x 17" Min: B5 LEF | |
| Paper Weight | 60 to 220 gsm | |
| Paper Capacity*2 | [Without Stapling] A4: 2000 sheets, B4 or larger: 1000 sheets, Mixed Size Stacking*3 : 300 sheets [With Stapling] A4: 100 sets or 1000 sheets*4 , B4 or larger: 75 sets or 750 sheets [With Booklet Finishing*5] 50 sets or 600 sheets [With Scoring*5] 500 sheets | |
| | Capacity | 50 sheets (90 gsm or less) |
| Staple | Paper Size | Max: A3, 11 x 17" Min: B5 LEF |
| | Position | Single stapling or Dual stapling |
| Punch*6 | Number of Holes | 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications) |
| | Paper Size | A3, 11 x 17", B4, A4*7, A4 LEF, Letter*7, Letter LEF, B5 LEF |
| | Paper Weight | 60 to 200 gsm |
| Booklet Finishing*5 | Capacity | Saddle Staple: 15 sheets, Scoring: 5 sheets |
| | Paper Size | Max: A3, 11 x 17" Min: A4, Letter |
| | Paper Weight | Saddle Staple: 64 to 80 gsm, Scoring: 64 to 105 gsm |
| Dimensions | W 657 x D 552 x H 1011 mm, With Booklet Finisher: W 657 x D 597 x H 1081 mm | |
| Weight | 28 kg, With Booklet Finisher: 37 kg | |

Note: Finisher-B1 is available only when optional 1Tray Module with Cabinet or 3 Tray Module is attached to Main Unit. *1: Paper size is smaller than B5, and larger than A3, 11 x 17" can be output from the Center Tray. *2: 64 gsm paper. *3: When larger size sheets are stacked on top of smaller size sheets. *4: 75 sets or 750 sheets with dual stapling. *5: The Booklet Finishing function requires the optional Finisher-B1 Booklet unit. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray. *6: The Punch function requires the optional Finisher-B1 Punch unit for 2-hole / 4-hole punch or Finisher-B1 Punch unit for 2-hole / 3-hole punch (US Specifications). *7: 3-hole punch is not applicable.

Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances refer to the Customer Expectation Document.

About Fuji Xerox Australia

With a noble purpose of 'liberating people to work smarter', Fuji Xerox Australia helps its clients to deliver the right information to the right people in the right format. This is achieved through the implementation of efficient business processes and effective communication. Fuji Xerox Australia is well recognised for its commitment to sustainability having received several awards including a United Nations 500 Roll of Honour listing and a Banksia Award for leadership in sustainability.

For more information, visit www.fujixerox.com.au or www.fxasustainability.com.au

Descriptions in this material, product specifications and / or appearances are subject to change without prior notice due to improvements. Please note that the product colour appears differently from the actual colour as a result of properties of papers or printing ink. Other company names or product names are registered trademarks or trademarks of each company. Spares for the standard configuration of installed machines is supported for up to 7 years from the date of the end of machine production.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

For more information or detailed product specification, please call or visit us at

Fuji Xerox Australia Pty. Ltd.

101 Waterloo Road, Macquarie Park, NSW Australia. 2113

Tel. 13 14 12

<http://www.fujixerox.com.au/>

